



Manhole Covers Ireland

We cover everything!

Lowpark, Charlestown, Co. Mayo, Ireland.


Phone 094 9033 022 Fax 094 925 4970

Email: info@mhcireland.com web Site www.mhcireland.com

DuraDrain D400 Full Batter/Splay Combined Drainage Kerb



60000 – Duradrain - Full Batter/45 Degree Splay

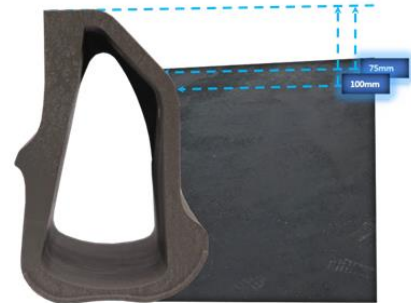


The recycled & recyclable lightweight standard units are manufactured from a hydraulically efficient material and have a large useable volume. This means large areas can be drained quickly and safely, protecting surfaces by taking run-off at multiple points across the whole length of the kerb-line.

Item Code	Description	Weight	Depth	Length	Width	Usable Flow	Kerb-Show	Certification / Loading
MH-DC-60000	305 Full Battered/Splay Standard Unit	7Kgs	305mm	500mm	220mm	22,182mm ²	100/75mm	EN1433:2004 D400
MH-DC-60090	305 Sp End Cap/Outlet	0.2 Kg	305mm	N/A	220mm	N/A	N/A	N/A



The Duradrain full batter ductile iron top and base units are a high quality and heavy duty access/outlet. For busy highway routes they are an ideal bind for combined kerb and drainage units as the extents of a drainage run can often be the most exposed.

Item Code	Description	Weight	Depth	Length	Width	Usable Flow	Kerb-Show	Certification / Loading
MH-DC-60050	305 Full Battered/Splay Gully Outlet	78 Kg	305mm	500mm	440mm	N/A	100/75mm	EN1433:2004 D400
MH-DC-60072	305 Full Battered/Splay Rodding Access/Outlet Unit	19Kgs	305mm	250mm	220mm	22,182mm ²	100/75mm	EN1433:2002 D400



Standard units can be supplied faceted to suit both external and internal radii.

Standard Units can be supplied cut and fixed to provide precise external and internal angles.

Duradrainsealant should be applied around the channel body up to the road-surface/inlet level. All units have a flush face to face contact so an effective watertight seal can be achieved for every joint. For more information, please our Design & Installation Guide.

