



Manhole Covers Ireland

We cover everything!

Portland, Lorrha, Nenagh, Co. Tipperary E45 DH99.

Phone 094 9033 022 Fax 094 925 4970

Email: info@mhcireland.com Website www.mhcireland.com

V100.00 Polymor Concrete Channel with Cast Edge

F900 Ductile Iron Grating



Sump Unit 500mm



Closing End Cap




Outlet Endcap

APPLICATIONS:

- n Building entrances
- n Service stations
- n Car parks
- n Pedestrian precincts
- n Kerbside drainage
- n Slow moving light commercial vehicles

CHANNEL MATERIAL SPECIFICATION:

- n Resistance to bending: 22 MPa
- n Resistance to compression: 90 MPa
- n Resistance to heat: 70°C (resin HDT)

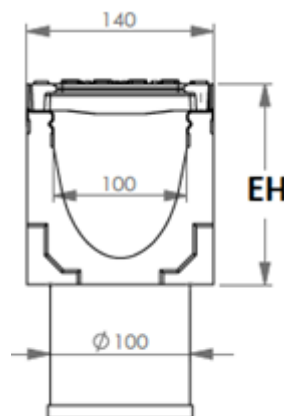

The polymer concrete drainage channel is a genuine all-round talent. Thanks to its high-strength steel edge and the longitudinal fixation lugs of the gratings, the drainage system is suitable for practically every application.

For use on industrial areas, Commercial Developments, Retail developments, Footpath drainage, Petrol Forecourt, Residential developments, Schools etc.

Loading class up to F900

Clear width 100mm

Edge made of 4 mm Cast Iron Edge Rail

100mm Knockout Bottom Outlet

Grating Locked in position with 4no Bolts per 500mm

Product Code	Length(mm)	Internal Width(mm)	External Width	Internal Height	External Height
Slotted 10mm AntiHeel Grating					
MH-DC-F-V100.00-HS	1000	100	140	120	150
MH-DC-F-V100.20-HS	1000	100	141	250	290
MH-DC-F-V100.30-HS	1000	100	141	300	340